


THE OTTO QUALITY DIFFERENCE

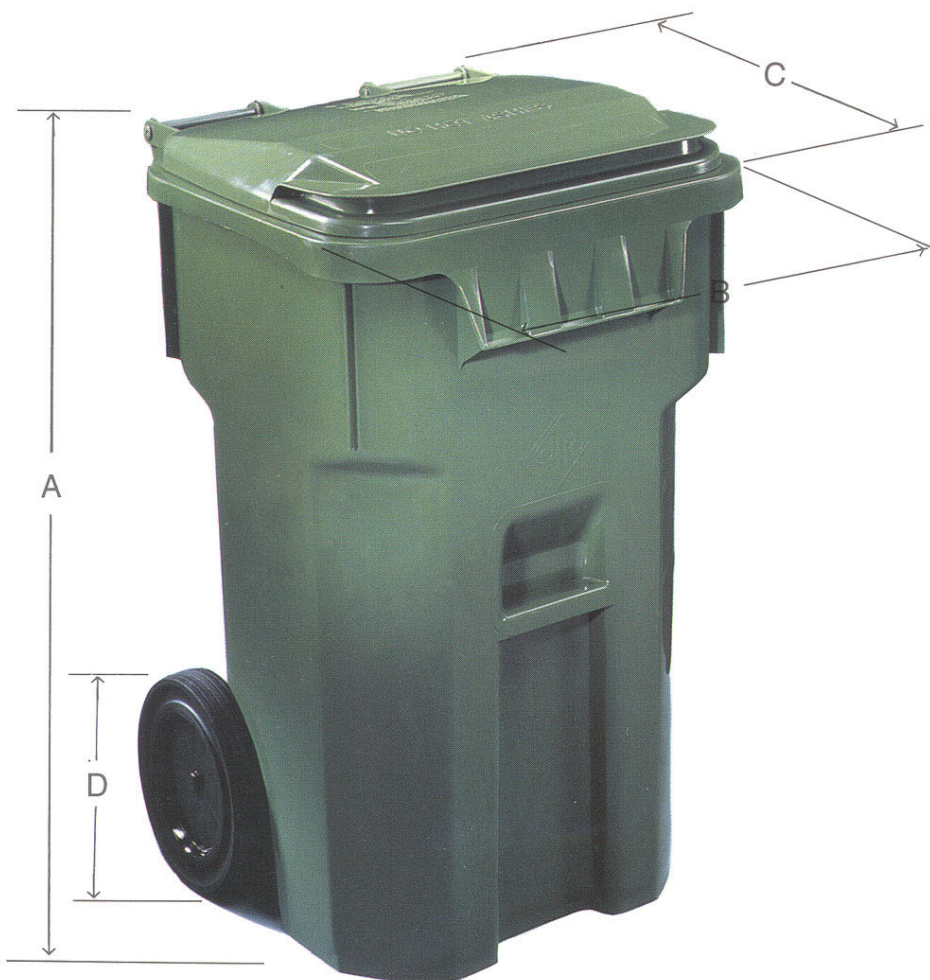

- ◆ Multi-system design (MSD) for various service applications.
- ◆ MSD carts compatible with all standard automated lift systems.
- ◆ Injection molded for durability and strength. Extra thick walls exceed industry standards.
- ◆ MSD carts are designed, tested to provide a minimum of 28 years of service at a collection frequency rate of one time per week.
- ◆ Dual wear strip engineered into construction for long bottom wear life.
- ◆ One piece attached lid - no assembly required.
- ◆ Stable in winds up to 40 mph, when empty!
- ◆ Theft resistant wheels assembly in seconds.
- ◆ Solid steel, rust resistant 7/8" axles - strongest in the industry.
- ◆ Overlapping form fit lid keeps critters, pests, precipitation out.
- ◆ Oversized 12" wheels for ease of use in the yard or pulling fully loaded carts to the curb.
- ◆ Patented toe hold for ease in tilting.

MSD Standard Cart Specifications

| UNIT | A Height | B Width | C Depth | D Wheel Diameter | Weight | Capacity | Max. Load Rating | Min. Wall Thickness (Base) | Min. Wall Thickness (Lid) |
|---------------|----------------------|---------------------|---------------------|---------------------|-------------------|------------------------|---------------------|----------------------------|---------------------------|
| MSD-32 | 38.50" 977.90 mm | 18.88" 479.55 mm | 22.50" 571.50 mm | 7.88" 200.00 mm | 27 lbs 12.2 kg | 32 gal 120.0 liters | 150 lbs 68.0 kg | 0.145" 3.68 mm | 0.130" 3.30 mm |
| MSD-68 | 42.12" 1069.85 mm | 25.25" 641.35 mm | 26.38" 670.05 mm | 11.75" 300.00 mm | 42 lbs 19.1 kg | 68 gal 260.0 liters | 220 lbs 98.8 kg | 0.175" 4.45 mm | 0.130" 3.30 mm |
| MSD-95 | 46.50" 1181.10 mm | 26.38" 670.05 mm | 33.62" 853.95 mm | 11.75" 300.00 mm | 49 lbs 22.2 kg | 95 gal 360.0 liters | 300 lbs 136.0 kg | 0.175" 4.45 mm | 0.130" 3.30 mm |

For more detailed specifications on MSD ALL IN ONE, Yard Waste, Dome Lid, Beverage Container Recycling, Secure Document Recycling Carts and insert components: