

Triumph™



Holtz Industries, Inc. | 200 S. Terrace Ct | Newark, OH 43055 - Call Us Toll Free: 1-800-535-0104


▼ Hybrid Plastic Container With Steel Reinforcements For Maximum Strength And Durability

- Weighs significantly less than same-size metal containers, improving worker safety
- Steel reinforcements strategically placed to support container, ensuring performance during heavy lifting
- Low maintenance—never needs painting, is easy to clean and is dent resistant
- Comprehensive steel protection with electrophoretic coating (electro-coating) to maximize container life in corrosive environments
- Angled front at fork pocket guides forks, improving collection efficiency and reducing damage to container during emptying
- 100% recyclable




Product is in compliance with A.N.S.I. standards.

▼ Features

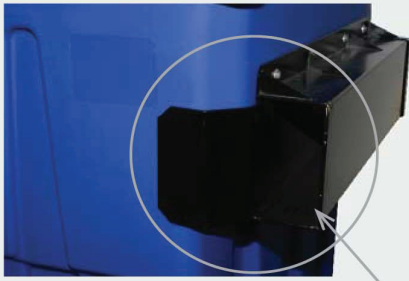

Coated steel pocket guides are standard on all Triumph™ front load containers for added protection during fork entry. Pocket inside dimensions are maximum height. Pockets installed at highest possible point for easy fork entry.

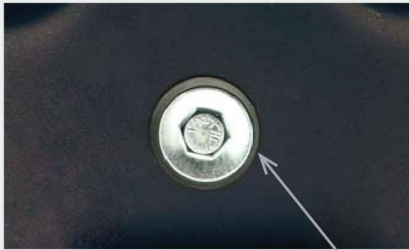

Standard oversized washer reinforced with separate rubber washer prevents leakage at container base.



Corrugated sides and bottom along with steel base plates on the Triumph™ provide additional support to sustain weight during lifting and transporting.



The rear load provides easy maneuverability functioning in tight or confined areas.

Low maintenance, dent resistant and significantly quieter than steel containers.

Industry standard lids on all containers

Containers have consistent wall thickness throughout for better performance

UV resistant for long term exposure to sun light

Polyethylene construction and sealed fasteners prevent leaking and maximize container life

1, 2, 3 & 4 yards come with casters for easy maneuverability

Corrugated sides and bottom for added strength



▼ Customize Your Triumph™



Front center surface area is designed for customer labeling. Standard maximum width available is 27", accommodating decal plate, sticker or heat transfer label for all front load containers.

▼ Rim Feature



Oversized and sealed container rim provides superior stiffness without trapping waste.




▼ Features



▲ 1 YARD FL

▲ 3 YARD FL

▲ 4 YARD FL

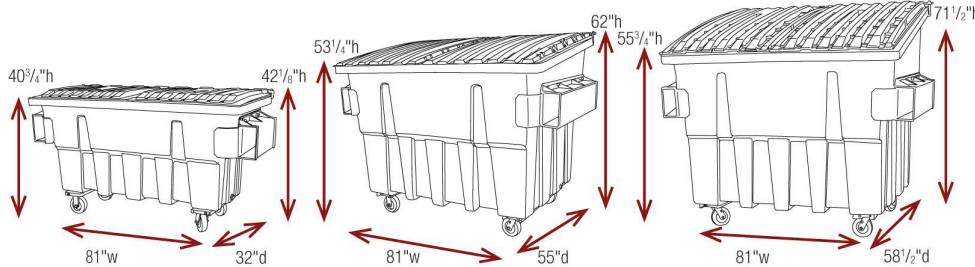

Measurements reflect maximum dimensions for each respective container size.

▼ Container Specifications

MODEL	WIDTH	LOAD HEIGHT	MAX. HEIGHT	DEPTH	LOAD RATING
1 YARD FL TRI	81"	40 3/4"	42 1/8"	32"	700 LBS.
3 YARD FL TRI	81"	53 1/4"	62"	55"	1500 LBS.
4 YARD FL TRI	81"	55 3/4"	71 1/2"	58 1/2"	2500 LBS.

Container specifications vary slightly based on product mold and are subject to change. Width includes lifting pockets.

▼ Shipping Information

MODEL	ASSEMBLY WEIGHT	STACK HEIGHT	T/L QTY (53' TRUCK)	LTL STACKING AND LTL MAX. QTY
1 YARD FL TRI	217 LBS.	5 HIGH	115°	VARIABLES BY ORDER
3 YARD FL TRI	373 LBS.	3 HIGH	33°	VARIABLES BY ORDER
4 YARD FL TRI	403 LBS.	2 HIGH	22°	VARIABLES BY ORDER

Shipping information varies slightly based on product mold and product location. °For maximum shipping capacity, some assembly is required. Shipping information is estimated.



The 1 1/2" solid steel trunnion bar on the Triumph™ Rear Load is supported with gussets to prevent damage when lifting heavy loads.



Quick change caster plates improve replacement efficiency. Steel support channels distribute heavy loads evenly across the container floor.




Triumph™ lifting sleeves are captured by a molded-in ledge to bear the weight during lifting. On the 6 and 8 yard containers, a two inch structural tube supporting the bottom is attached to the lift pockets by side support brackets to manage heavier loads.



Quality design, workmanship and product testing result in reliability and performance in the field.



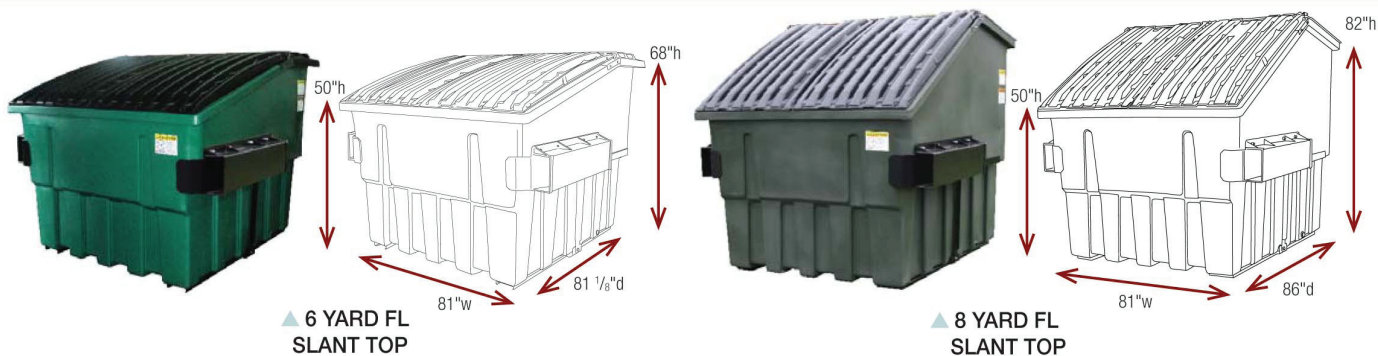

▼ Container Specifications

MODEL	WIDTH	LOAD HEIGHT	MAX. HEIGHT	DEPTH	LOAD RATING
6 YARD FL SLANT TRI	81"	50"	68"	81 1/8"	3500 LBS.
8 YARD FL SLANT TRI	81"	50"	82"	86"	5000 LBS.

Container specifications vary slightly based on product mold and are subject to change. Width includes lifting pockets.

▼ Shipping Information

MODEL	ASSEMBLY WEIGHT	STACK HEIGHT	T/L QTY (53' TRUCK)	LTL STACKING AND LTL MAX. QTY
6 YARD FL SLANT TRI	530 LBS.	2° HIGH	16	VARIES BY ORDER
8 YARD FL SLANT TRI	552 LBS.	2° HIGH	VARIES BY ORDER	VARIES BY ORDER


Shipping information varies slightly based on product mold and product location.



Measurements reflect maximum dimensions.

▼ Available Colors

The Otto Triumph™ is available in 8 standard colors. Lids are black and complement all container colors.

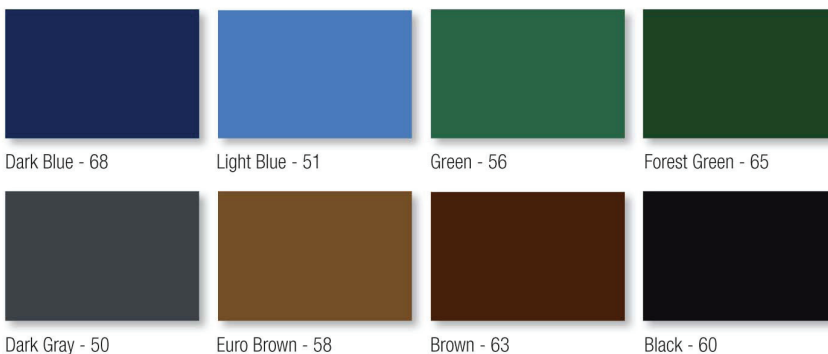

Colors as shown in this document may differ slightly from the actual product.

▼ Container Specifications

MODEL	WIDTH	LOAD HEIGHT	MAX. HEIGHT	DEPTH	LOAD RATING
2 YARD RL TRI	78"	48 3/4"	50"	49 3/4"	1000 LBS.

Container specifications vary slightly based on product mold and are subject to change.

▼ Shipping Information

MODEL	ASSEMBLY WEIGHT	STACK HEIGHT	T/L QTY (53' TRUCK)	LTL STACKING AND LTL MAX. QTY
2 YARD RL TRI	300 LBS.	5 HIGH	85	VARIES BY ORDER

Measurements reflect maximum dimensions for each respective container size. Shipping information is estimated.