

CH8000 CONTAINER HANDLER

Holtz Industries, Inc.
 200 South Terrace Court, Newark, OH 43055
 TF: 1-800-535-0104 | Web: www.holtzindustries.com

Standard Features

- ▶ Handles front-load containers from 2 to 10 yards and rear-load containers from 2 to 6 yards
- ▶ Back-up alarms and hoist-up alarm with signal light
- ▶ Available with rotator for emptying containers; 200° rotator on "R" model
- ▶ Pintle or Reese-ready apron
- ▶ Direct-mount pump
- ▶ Oil reservoir (inside frame mount)
- ▶ Inside air controls
- ▶ Bumper with recessed LED lighting
- ▶ Poly fenders
- ▶ Retainer straps
- ▶ Black two-part epoxy paint*

Galbreath container handlers are ideal for container delivery, pick-up, and placement, as well as moving containers around a yard.

Available Models:
 CH8000 (No Rotator)
 CH8000-R (With Rotator)



*Model shown has inboard-mounted hydraulic tank.

Options

- ▶ Air compressor for non-air trucks
- ▶ Toter platform
- ▶ Toolbox (side mount)
- ▶ Toolbox (behind cab)
- ▶ PTO manual or automatic transmission
- ▶ Wet spline pump/PTO upgrade
- ▶ Lid and rod holder (behind cab or side-mount)
- ▶ Pintle hook or Reese hitch set-up
- ▶ Work lights (multiple options)



Pintle-ready apron or Reese hitch options available



Outside controls with safety cover




Extra CA can be added for storing lids, welders, toolbox, etc.



Rotating arms dump into a 30-yard open-top container

* Factory mount

CH8000 CONTAINER HANDLER

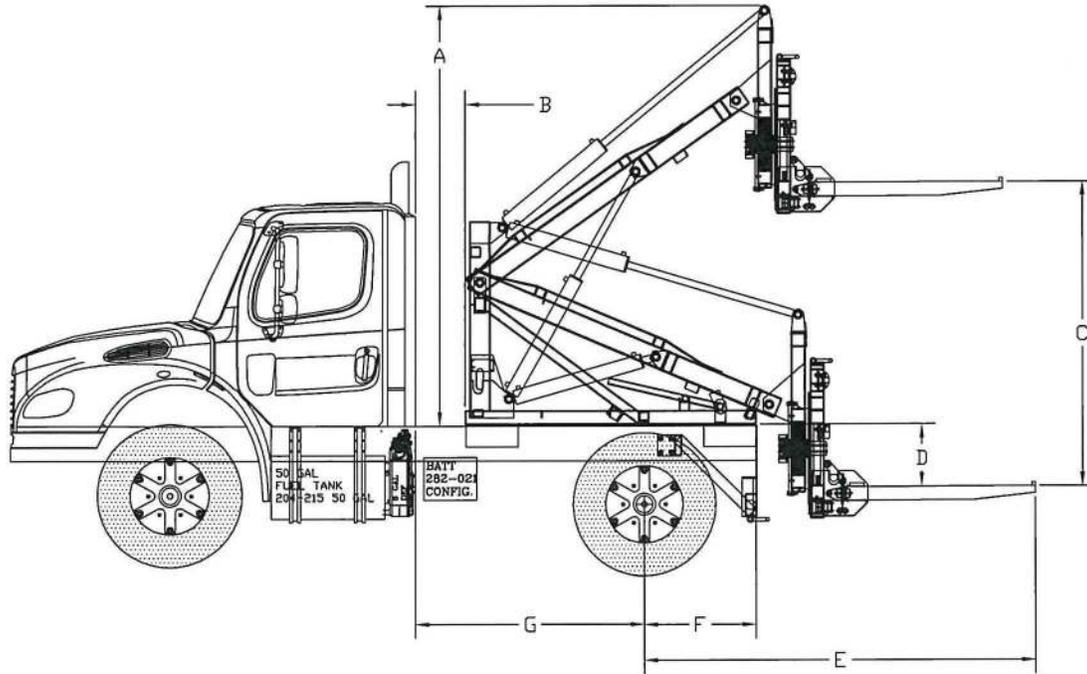

CH8000

A = 122-11/16"

B = 14-5/16"

C = 92-3/16"

D = 11-5/8"

E = 106-3/4"

F = 32"

G = 66" min*

CH8000-R

A = 120-1/2"

B = 14-5/16"

C = 87-1/4"

D = 17-7/8"

E = 112-1/16"

F = 32"

G = 66" min*

SPECIFICATIONS

Container Size	2 to 10 yard (front-load) 2 to 6 yard (rear load)
Rated Capacities*	8,000 lbs. (lifting) 4,000 lbs. (hauling) 4,000 lbs. (rotating)
Ratchet / Hold Down System	Retainer straps
Air Controls	Inside air controls for conventional cab; 2 spool standard (non-rotator) or 3 spool (rotator)
Lighting	LED lighting
Safety	Hoist-up alarm with signal light
Fenders & Bumpers	Poly with standard LED light bumper
Frame Assembly	5" x 3"
Finish / Paint	Two-part epoxy black primer**
Other	Direct mount pump Oil reservoir (inside frame mount) Outside 2 or 3 spool valve Rear load attachment Pintle or Reese-ready apron

NOTE: All dimensional items shown are based on 43" truck frame height.

Cans must be flagged during the day or lighted when dark.

* Add 36" for Toter cart platform. Add 24" for behind-the-cab toolbox or lid holder. Typical CA is 80" without Toter cart platform.

* The above capacity ratings are based on container's center of gravity out 24" on forks. With a loaded container, travel is limited to 20 MPH on a smooth, level terrain. **!!WARNING!!** Increased speeds and rougher terrain will substantially reduce the rated capacity of the container handler. Do not exceed rated capacity of (1) container handler, (2) container, or (3) truck. Doing so may result in damage to equipment and/or injury to persons.

** Factory mount



Holtz Industries, Inc.

200 South Terrace Court, Newark, OH 43055

TF: 1-800-535-0104 | Web: www.holtzindustries.com