## **AC-OR-416 TRAILER HOIST**



Holtz Industries, Inc. 200 South Terrace Ct, Newark, OH 43055 TF: 1-800-535-0104 | Web: www.holtzindustries.com







All Galbreath products are designed to be compliant with ANSI standard container requirements.

## **Features**


- ▶ Designed for hauling scrap and refuse
- ▶ 80,000 lb. manufacturer's rated capacity
- ► Handles 18-24' containers
- Proven Galbreath quality means the hoist is built to last
- ► Two outboard lift cylinders provide greater stability
- Available in OR, IO, EX, HH, and EH models
- ▶ Good return on investment
- ► High resell value

## **Options**

- ▶ Lift axle
- ► Air ride suspension
- ▶ Tire carrier
- Wet kit
- ▶ Rear wing plate

Inside/Outside Rail (10)

## **AC-OR-416 TRAILER HOIST**

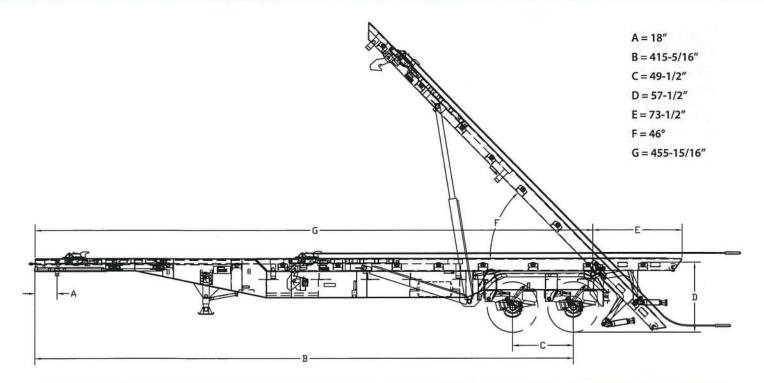

GENERAL TRAILER INFO		
Overall Trailer Length	$(G + E) = 44' \times 2''$	
Weight	17,150 lbs	
Dump Angle	(F) 46°	
Ratchet / Hold Down System	Ratchet	
Container Range	18'- 24'	
Hoist Capacity	60,000 lbs (50,000 lbs HH Models)	
GVWR Rating	80,000 lbs (50,000 lbs HH Models)	
Rollers / Sheaves	All Greasable	
Lighting	LED	

STRUCTURES		
Hoist Frame	10" x 4" x 3/8" Rect. Tubing ASTM A500 Grade C (3/8" EX)	
Trailer Frame	22" x 36# W.F. I-Beam A36	
Cable	7/8", 6 x 37 EXIWRC Regular Right Lay	

AXLES, SUSPENSION AND BRAKING	
25,000 lbs	
45,000 lbs Henway ATR	
200,000 lbs, 2 Speed	
11R x 22.5 16 Ply	
10 Hole Hub Piloted	
Full Steel 12-Gauge Front, 14-Gauge Rear	
ABS	

HYDRAULICS	
Lift Cylinders	6" x 4-1/2" x 72" DA
Winch Cylinders	6" DA, 3" Ground, Polished & Chrome
Working Pressure	2,000 PSI
Maximum Pressure	2,500 PSI
Hoses	SAE 100R2 or Greater for 5,000 PSI Max, 2,500 PSI Working
Plumbing	Hydraulic Steel Tubing

