



# QUANTUM XL



Holt Industries, Inc.  
200 S Terrace Ct | Newark, OH | 43055  
PH: 1-800-535-0104 | Web: [www.holtindustries.com](http://www.holtindustries.com)



# QUANTUM XL

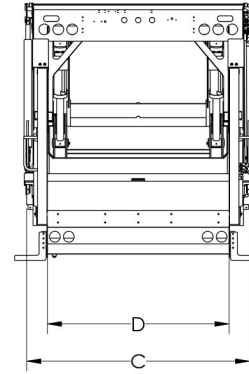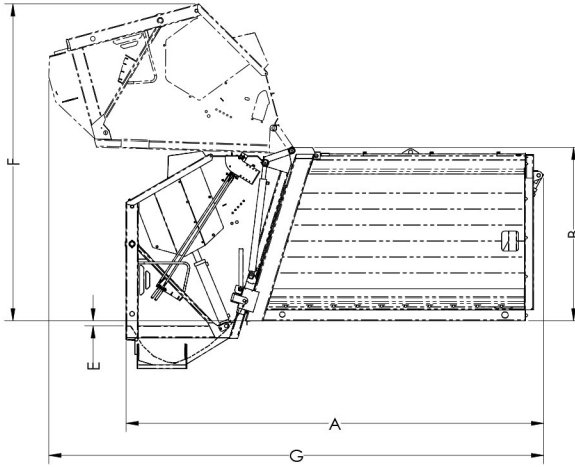

## Body Specifications

	16 CU. YD.	20 CU. YD.
A: LENGTH OF BODY	206"	234"
B: HEIGHT OF BODY ABOVE CHASSIS	87"	87"
C: BODY WIDTH	96"	96"
D: HOPPER OPENING WIDTH	74"	74"
E: LOADING SILL BELOW CHASSIS FRAME	2"	2"
F: HEIGHT OF TAILGATE ABOVE CHASSIS FRAME (TAILGATE RAISED)	159"	159"
G: LENGTH OF BODY (TAILGATE RAISED)	245"	273"
- HOPPER CAPACITY	2.5 CU. YD.	2.5 CU. YD.
- DYNAMIC HOPPER CAPACITY (CU. YD. /Min.)	10 CU. YD.	10 CU. YD.
- APPROX. BODY WEIGHT	10,100 LBS	10,650 LBS

## Minimum Chassis Requirements

	16 CU. YD.	20 CU. YD.
MINIMUM GVWR	33,000 LBS	33,000 LBS
- FRONT AXLE	12,000 LBS	12,000 LBS
- REAR AXLE	21,000 LBS	21,000 LBS
- CAB TO AXLE	117"	145"
- CHASSIS FRAME HEIGHT	36"-39"	36"-39"210"

## Body Construction

- Roof: 10 gauge GR80
- Sides: 10 gauge GR80
- Floor: 10 gauge GR80
- Ejection Panel: 10 gauge GR80
- Sweep Face 3/16 GR100
- Tailgate side wall: 7 gauge GR50
- Tailgate Floor: 3/16 AR400

## Features

- Pack cycle time of 15 seconds
- Curved floor provides liquid sump
- High strength chiseled shell body
- Patented packing mechanism
- Low body height
- Easy to maintain
- Rear Fenders standard

## Hydraulics

- Oil Reservoir: 36 gal.
- Oil Flow w/ Standard Pump: 36 GPM
- Operating Pressure: 2,500 PSI tailgate, 3,000 PSI body
- Engine RPM: 1,300 RPM
- Hose Burst Ratio: 4 to 1
- Return Filter: 10 micron
- Pack Cylinders: 4.5"
- Sweep Cylinders: 4.5"
- Eject Cylinder, 5" 2 stage telescopic
- Tailgate Lift: 3"

## Optional Features

- Container lip-and-latch with roll bar
- Container 8,000 lb. drum winch with lip-and-latch
- Single cart tipper & dual tippers
- Cart tipper tap-in-kits
- Work lights & strobe lights
- LED stop, tail, turn, reverse
- Broom and shovel holder
- Rear view color camera system



Holtz Industries, Inc.

200 S Terrace Ct | Newark, OH | 43055

PH: 1-800-535-0104 | Web: [www.holtzindustries.com](http://www.holtzindustries.com)